


<b>standard frequency</b>	5.000MHz
<b>center frequency</b>	4.967MHz
<b>adjust frequency</b>	±7KHz @ 25°C
<b>cut mode</b>	AT
<b>resonator resistance</b>	<15Ω
<b>shunt capacitance</b>	<7pF
<b>working temperature</b>	0°C ~ +70°C
<b>store temperature</b>	-40°C ~ +105°C
<b>diameter</b>	<14mm
<b>crystal shapes</b>	convex plano
<b>curvature</b>	210
<b>surface finish</b>	7um
<b>plano side electrodes materials</b>	Cr/ Au
<b>plano side electrodes sizes</b>	please refer to drawing below
<b>convex side electrodes materials</b>	Cr/ Au

**outside shapes and electrodes size drawings:**

**side A**

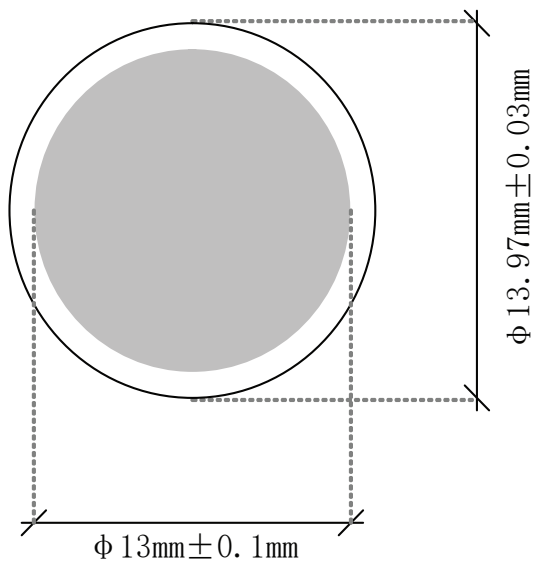

**side B**

