


Type 7H / 7HL (45 ~ 1500)MHz

- # Two ~ five times tuning
- # 50Ω or 75Ω impedance
- # Low insertion loss from 1dB
- # Standard or custom designs available
- # RoHS compliant


A database of standard designs, with the addition of a custom centre frequency is available upon request

Custom produced samples are available within two weeks

Standard case styles and dimensions (mm):

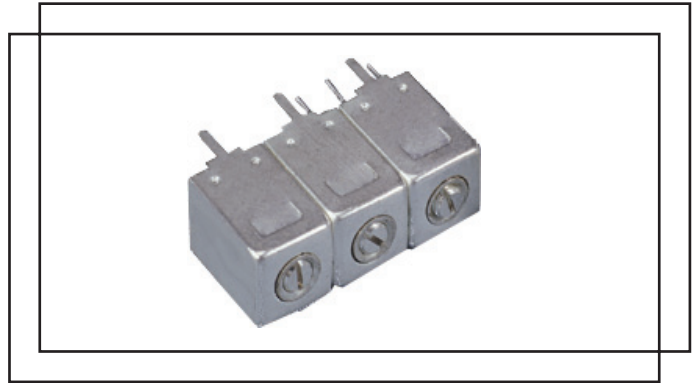


7H2 (TD)

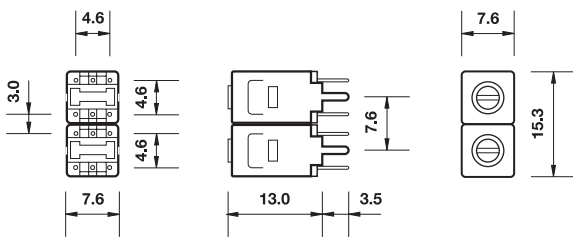


Lug dimensions: (1.0 x 0.25t)mm
Pin diameter: 0.5mm

7H3 (TT)

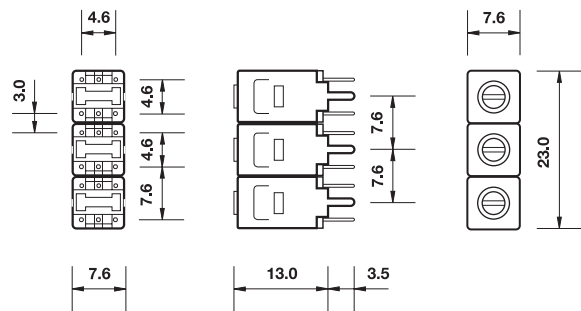


Lug dimensions: (1.0 x 0.25t)mm
Pin diameter: 0.5mm

7H4 (TF)

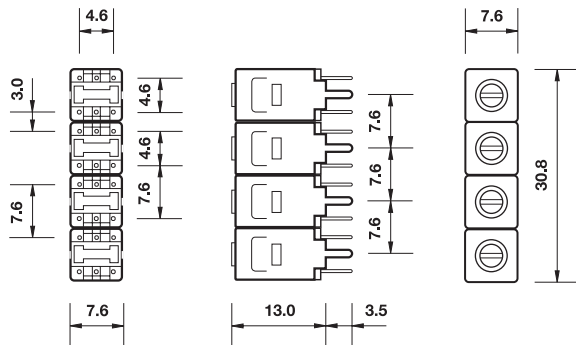

Lug dimensions: (1.0 x 0.25t)mm
Pin diameter: 0.5mm

7H5 (TV)

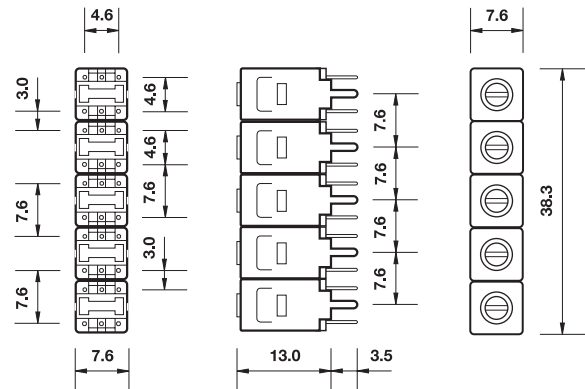

Lug dimensions: (1.0 x 0.25t)mm
Pin diameter: 0.5mm