


## Type 7S (230 ~ 1500)MHz

- # Two ~ four times tuning
- # 50Ω impedance
- # Low insertion loss from 1dB
- # Standard or custom designs available
- # RoHS compliant


A database of standard designs, with the addition of a custom centre frequency is available upon request

Custom produced samples are available within two weeks

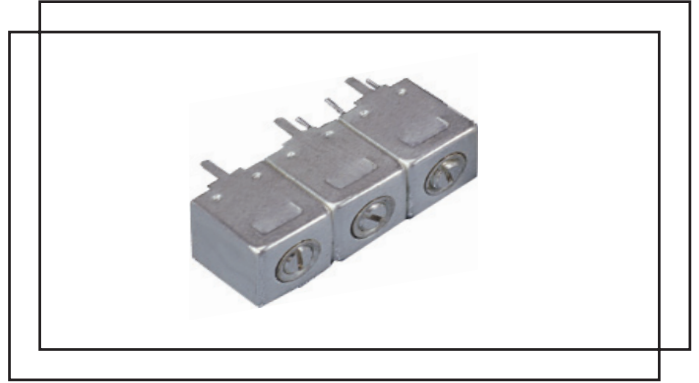


### Standard case styles and dimensions (mm):

#### 7S2 (TDS)

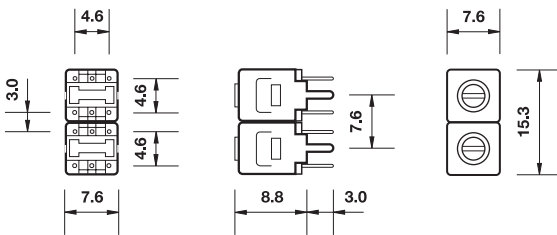


Lug dimensions: (1.0 x 0.25t)mm  
Pin diameter: 0.5mm

#### 7S3 (TTS)

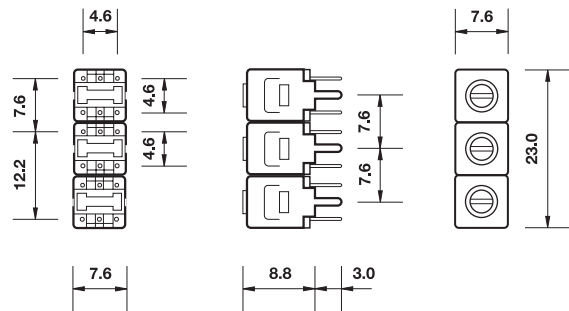

Lug dimensions: (1.0 x 0.25t)mm  
Pin diameter: 0.5mm

#### 7S4 (TFS)

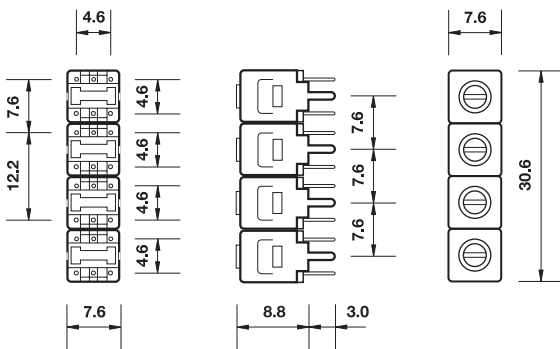

Lug dimensions: (1.0 x 0.25t)mm  
Pin diameter: 0.5mm