


Type 5W / 5WL (230 ~ 2600)MHz

- # Two ~ four times tuning
- # 50Ω or 75Ω impedance
- # Low insertion loss from 1dB
- # Standard or custom designs available
- # RoHS compliant


A database of standard designs, with the addition of a custom centre frequency is available upon request

Custom produced samples are available within two weeks

Standard case styles and dimensions (mm):

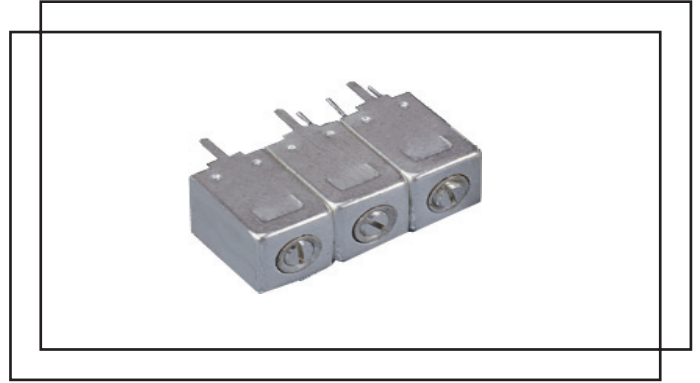


5W2 (TDW)

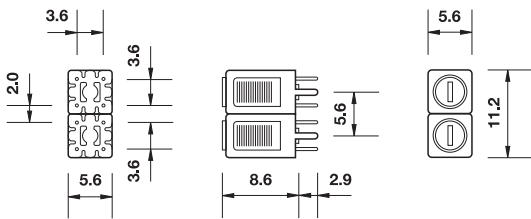


Lug dimensions: (0.9 x 0.25t)mm
Pin diameter: 0.5mm

5W3 (TTW)

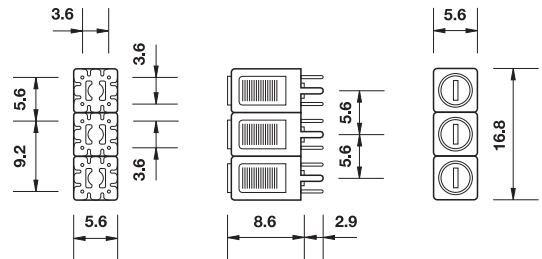

Lug dimensions: (0.9 x 0.25t)mm
Pin diameter: 0.5mm

5W4 (TFW)

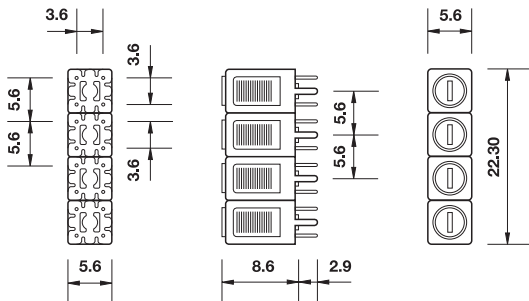

Lug dimensions: (0.9 x 0.25t)mm
Pin diameter: 0.5mm