


**Type 5R  
(230 ~ 1600)MHz**

- # Two ~ four times tuning
- # 50Ω impedance
- # Low insertion loss from 1dB
- # Standard or custom designs available
- # RoHS compliant

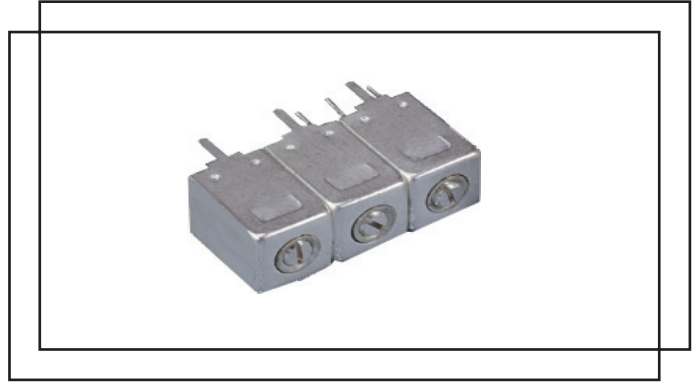


A database of standard designs, with the addition of a custom centre frequency is available upon request

Custom produced samples are available within two weeks


**Standard case styles and dimensions (mm):**

**5R2 (TDR)**

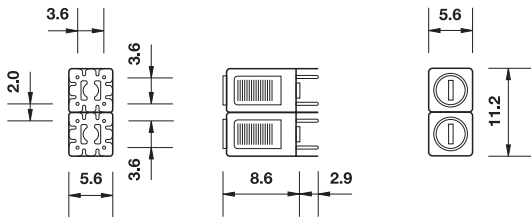


Lug dimensions: (0.9 x 0.25t)mm  
Pin diameter: 0.5mm

**5R3 (TTR)**

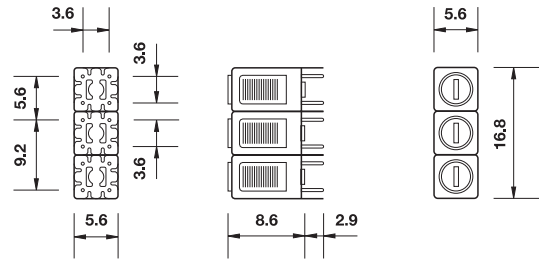

Lug dimensions: (0.9 x 0.25t)mm  
Pin diameter: 0.5mm

**5R4 (TFR)**

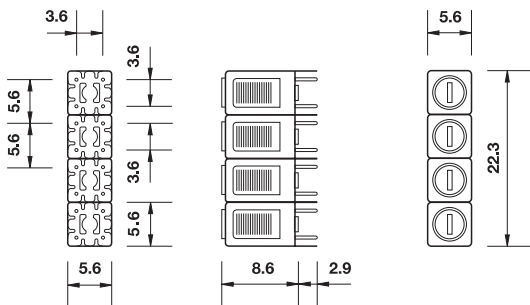

Lug dimensions: (0.9 x 0.25t)mm  
Pin diameter: 0.5mm