


## 45.0MHz fundamental filter

- # discrete units
- # standard designs
- # 45.00MHz nominal
- # excellent selectivity
- # low terminating impedance



Model	Nominal Frequency	Passband (dB) ±(kHz)	Stopband (dB) ±(kHz)	Ripple (dB)	Loss (dB)	Terminating Impedance (Ω//pF)	No. of Poles	Model Type
45M08B1	45.00	3 3.75	30 12.5	1.0	4.0	330//7	4	UM-1 x 2
45M10B1	45.00	3 5.0	30 18.0	1.0	3.0	390//4	4	UM-1 x 2
45M12B1	45.00	3 6.0	30 12.0	1.0	3.0	390//4	4	UM-1 x 2
45M13B1	45.00	3 6.5	35 25.0	1.0	3.0	390//4	4	UM-1 x 2
45M15A1	45.00	3 7.5	15 25.0	0.5	2.0	470//6	2	UM-1
45M15B1	45.00	3 7.5	30 25.0	1.0	3.0	470//3	4	UM-1 x 2
45M15C1	45.00	3 7.5	60 25.0	2.0	5.0	470//3	6	M-107
45M18A1	45.00	3 9.0	15 30.0	0.5	2.0	470//6	2	UM-1
45M18B1	45.00	3 9.0	30 30.0	1.0	3.0	500//3	4	UM-1 x 2
45M35B1	45.00	3 17.50	35 50.0	1.0	3.0	1000//1	4	UM-1 x 2
47M20A1	47.450	3 10.0	15 35.0	0.5	2.0	560//5	2	UM-1
47M20B1	47.450	3 10.0	35 35.0	1.0	3.0	560//2	4	UM-1 x 2

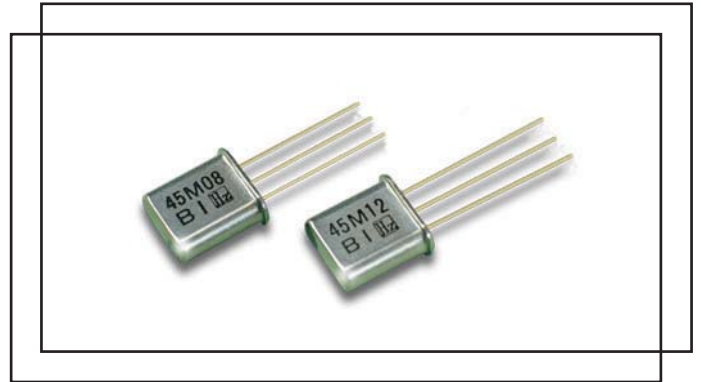