


standard frequency	5.000MHz
center frequency	4.967MHz
adjust frequency	±7KHz @ 25°C
cut mode	AT
resonator resistance	<15Ω
shunt capacitance	<7pF
working temperature	0°C ~ +70°C
store temperature	-40°C ~ +105°C
diameter	<14mm
crystal shapes	convex plano
curvature	210
surface finish	7um
plano side electrodes materials	Cr/ Au
plano side electrodes sizes	please refer to drawing below
convex side electrodes materials	Cr/ Au

outside shapes and electrodes size drawings:

side A

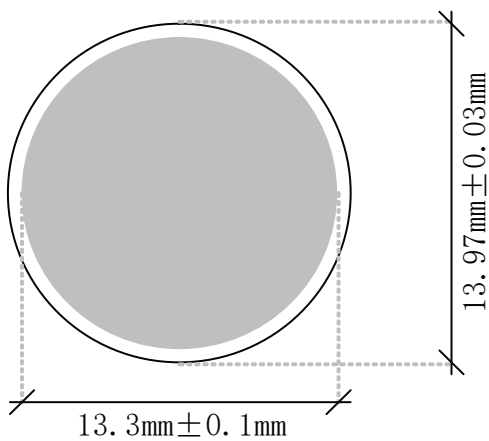

side B

